

DIP356-H

Product Specification



Features

- ① Atheros Chipset, Powerful CPU for High Data Transmission Rate
- ② DIP Technology for Easy Setup
- ③ Professional NETCHECK Software for Monitoring, Testing and Maintenance




NETCHECK

For monitoring wireless transmission. When devices break down, the netcheck system can help to check the problems.

You can view the wireless transmission and record the wireless working data.

- ① Location. Mark Each Device in The System
- ② Data Record Time Period Setting
- ③ Alarm
- ④ Data Analysis
- ⑤ Data Log
- ⑥ Real Time Monitoring on Frequency, Signal, Bandwidth, Transmission Rate

类型	名称	IP地址	无线Mac	信道	功率 (dbm)	数据速率	传输时间 (s)	备注
AP	192.168.119.0			0	0	0	25	
AP	192.168.119.1	44:09:4D:4A:78:25	9786	27	1	25		
CFE	192.168.119.5	44:09:4D:73:82:42	9786	27	1	25		
AP	192.168.129.1	44:09:4D:85:82:33	9240	27	1	25		
CFE	192.168.129.2	44:09:4D:87:AC:25	9240	27	1	25		
CFE	192.168.129.3	44:09:4D:C7:9A:39	9240	27	1	25		
CFE	192.168.129.4	44:09:4D:F1:17:09	9240	26	1	25		
AP	192.168.129.1	44:09:4D:25:96:65	3063	27	1	25		
CFE	192.168.129.2	44:09:4D:83:AD:29	3063	27	1	25		
CFE	192.168.129.4	44:09:4D:89:4A:45	3063	27	1	25		
CFE	192.168.129.4	44:09:4D:9C:AD:9C	3063	27	1	25		
CFE	192.168.129.5	44:09:4D:25:92:9C	3063	27	1	25		

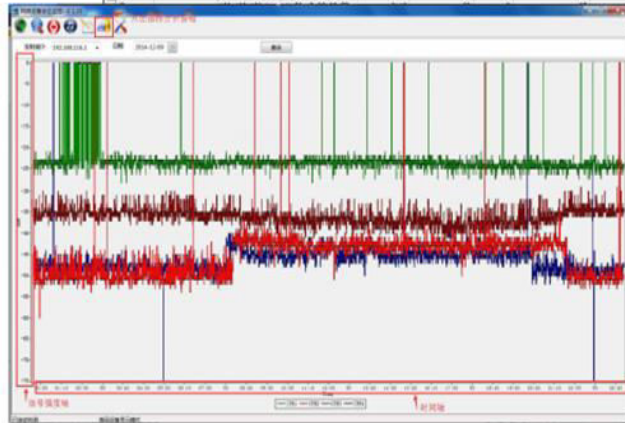

Specification

- ① Chipset : AR9344 600MHz
- ② Transmission Range : 3KM
- ③ Transmission Rate : 300Mbps
- ④ Antenna Gain : 18dBi
- ⑤ Transmission Power : 27dBm
- ⑥ Transmission Frequency : 5.8GHz

Chipset	Atheros AR9344 600MHz			
DRAM	DDR2 64MByte			
FLASH	8MByte			
功放 IC	SiGe5012B			
Port	10/100Mbps LAN*2			
Speed	11a:54M, 48M, 36M, 24M, 18M, 12M, 9M, 6Mbps			
	HT20:7. 2M, 14. 4M, 21. 7M, 28. 9M, 43. 3M, 57. 8M, 65M, 72. 2M, 14. 4M, 28. 9M, 43. 3M, 57. 8M, 86. 7M, 115. 6M, 130M, 144. 4Mbps			
	HT40:15M, 30M, 45M, 60M, 90M, 120M, 135M, 150M, 30M, 60M, 90M, 120M, 180M, 240M, 270M, 300Mbps			
Transmission	(DSSS)			
Modulation	OFDM/BPSK/QPSK/CCK/DQPSK/DBPSK			
Standard	IEEE802. 11n, IEEE802. 11a , IEEE802. 3u			
Standard	CSMA/CA, TCP/IP, IPX/SPX, NetBEUI, DHCP, NDIS3, NDIS4, NDIS5			
Channel	4920~6085MHz			
Power dissipation	≤6W			
Power	POE 24V 1A			
RF @25°C ± 2dB	802. 11a	6~24Mbps	26 ± 2dBm	
		36~48Mbps	25 ± 2dBm	
		54Mbps	23 ± 2dBm	
	802. 11n	HT20	MCS 0-3	26 ± 2dBm
			MCS 4	25 ± 2dBm
			MCS 5	24. 5 ± 2dBm
			MCS 6	25 ± 2dBm
			MCS 7	24. 5 ± 2dBm
		HT40	MCS 0-3	26 ± 2dBm
			MCS 4	25. 5 ± 2dBm
	MCS 5		25 ± 2dBm	
	MCS 6	24. 5 ± 2dBm		
	MCS 7	24 ± 2dBm		
Sensitivity	802. 11a	6Mbps ≤ -89; 54Mbps ≤ -73		
	802. 11n	HT20	MCS 0 ≤ -86; MCS 7 ≤ -68	
		HT40	MCS 0 ≤ -83; MCS 7 ≤ -65	
Antenna	Frequency	4900~6100MHz		
	Direction	Horizontal/Vertical		
	Gain	16DBi		
Management	WEP management	yes		
	SNMP MIB	yes		
	Telnet	yes		
	Serial	yes		
Security	MAC address control	NO		
	Encryption	WEP 64/128bits, WPA, WPA2, 802. 1x		
Working Condition	Working temperature	-30~65°C		
	Storage Temperature	-50~80°C		
	Humidity (non-condensed)	≤95%		

Product Size

Size: 200*200*130.5MM

N. W: 0.5kg



Connection diagram

