



SV2H-D4313

Key Features :

- 1080P Resolution
- 1/3" SONY CMOS Sensor
- 4in1 (AHD/TVI/CVI/CVBS)
- True Day & Night
- Wide Operating Voltage (8V to 20V DC)
- Reverse Voltage Protection
- Natural Color
- Low Noise & Color Under Low Light Condition


Specifications :

Model	SV2H-D4313 / SV2H-D4313W		
Image Device	1/3" Color SONY IMX CMOS Sensor		
DSP	NEXTCHIP NVP2441H		
System	PAL/NTSC		
Resolution	PAL : 25fps (1920 x 1080)		
Pixels	1920(H) x 1080(V)	Sync. System	Internal
S/N Ratio	≥48dB	White Balance	Auto
Illumination	0.001 LUX	Day / Night	Auto (ICR)/Color/B/W
		Video Output	AHD/TVI/CVI/CVBS AHD (Default)
Lens Furnished	Board Lens 3.6mm / F1.8		
Infrared Luminary	36pcs IR LED		
Wavelength	850nm		
Illumination Distance	20 M		
Power	DC 12V±10% (8V ~ 20V)		
Power Consumption	100mA (without IR), 400mA (with IR)		
Operating Temp.	-20°C ~ 50°C		
Storage Temp.	-25°C ~ 70°C		
Mechanical			
Dimension	60mm (H) x 90mm (W) x 90mm (D) excluding connectors		
Weight	0.16kg		
Connectors	Video Output: BNC Power: DC 5mm Female Jack		
Mounting Screw Size	5mm		


* Specification Subject to change without prior notice




4in1 Output Switching Method :

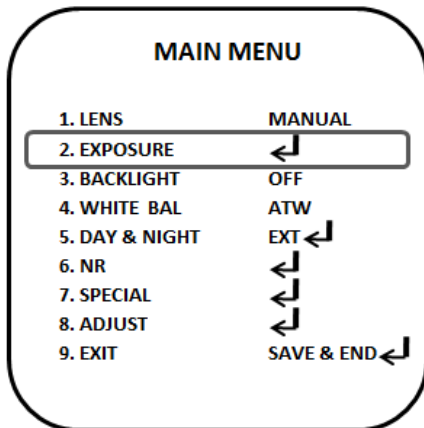

1. OSD Main Menu
2. Select EXPOSURE, press RIGHT button x 3 times then follow by ENTER.
3. After ENTER, the HIDDEN menu will appear.

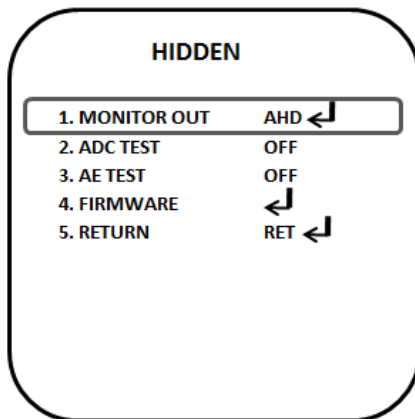

1. In HIDDEN Menu, select MONITOR OUT.
2. Press LEFT/RIGHT button to select between AHD/TVI/CVI/CVBS output mode.
3. After select, press ENTER.

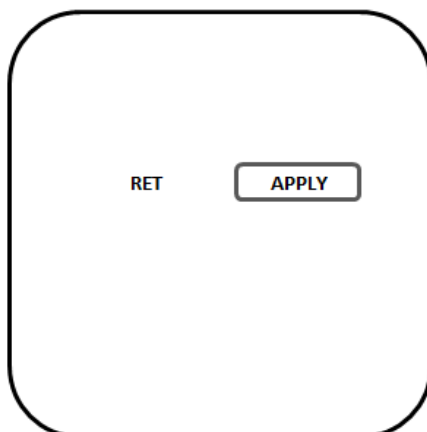

1. Press RIGHT button to APPLY and then ENTER to apply new output setting.