



**eLock-SL500W**



### Features

- ✓ Compact size and easy to install
- ✓ Micro controller with door opening delay and door sensor output functions
- ✓ Suitable for 180° door open aluminum or wooden doors.
- ✓ Relock function will activate to lock the door automatically ( maximum 60 times per session) when the door is not locked properly
- ✓ Auto adjustable power supply 12/24V
- ✓ Maximum holding force up to 1200kg
- ✓ Weather resistant rating IP65

### Specification


Power Supply	DC 12V ~ DC 24V $\pm$ 15%
Operation Current	900mA
Holding Current	220mA@12VDC mA $\pm$ 5% 190mA@24VDC mA $\pm$ 5%
Application	All types of 90° ~180° door
Maximum Shear Force	2600lbs (1200kg)
Magnetic Distance (Max.)	3mm @ 12V / 5mm @ 24V
Operation Delay time	15 Sec (fixed)
Lock Status Sensor	N.C & N.O Output (1A@24VDC)
IP Rating	IP 65
Relock Function	Maximum 60 times
Demagnetizer Design	Instant demagnetizer when power is off
Weight	1200g (included wrapping)

## Dimension

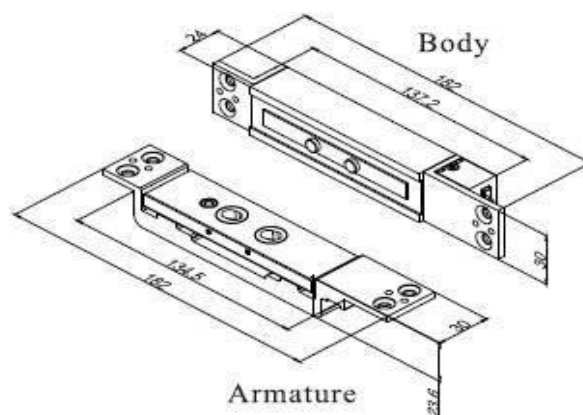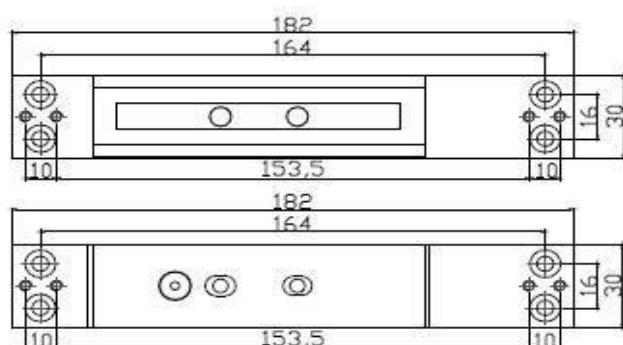

## Connection & Accessories

Red	VCC (DC 12V ~ 24V)
Black	GND
Brown	LED Indicator (Blue)
Orange	LED Indicator (Black)
White	Lock Status Sensor (N.C)
Purple	Lock Status Sensor (N.O)
Grey	Lock Status Sensor (COM)
Blue	Reserved
Green	Door Position Sensor (COM)
Yellow	Door Position Sensor (N.C)

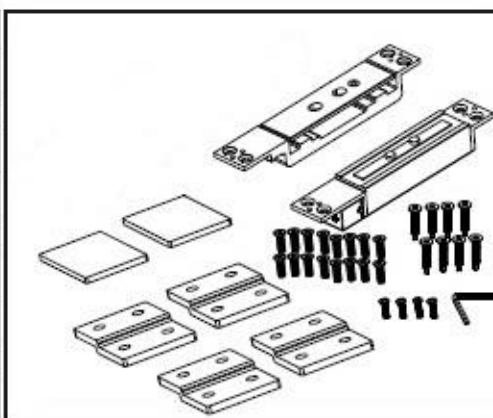

Type	Quantity
Screw M5X8	16
Screw M5X25	8
Screw M4X12	4

Type	Quantity
Shims	4
M3 Allenkey	1

Type	Quantity
Plastic Board	2
Led connector	1

## Installation



Please check before installation:

1. Please make sure the inner width and depth of door frame and door leaf (hollow metal door) are wide and deep enough to install the lock. Make sure the closing position of the door leaf is at the accurate place to enable the shear lock to lock accurately. Door closer is able to place the door leaf's closing position back to the accurate place to avoid other factor such as wind.
2. The start current of shear lock is 1.0A and therefore reduces to 0.5A when it is locked. The of the power supply has to be above 1A for the lock to operate.

\*Fixed holes: (Installation of the lock and screws are different for solid doors and hollow doors.)

## A: Solid door



(A represents solid door's fixed screw holes)

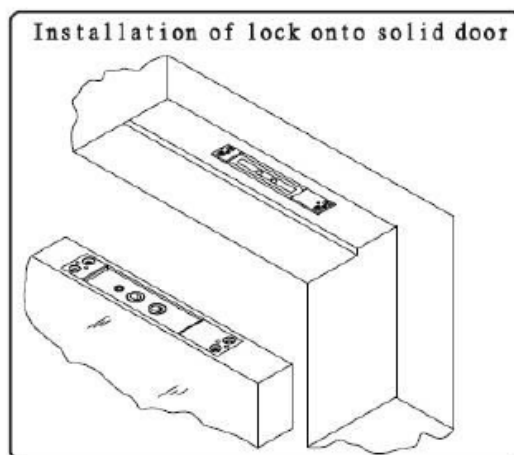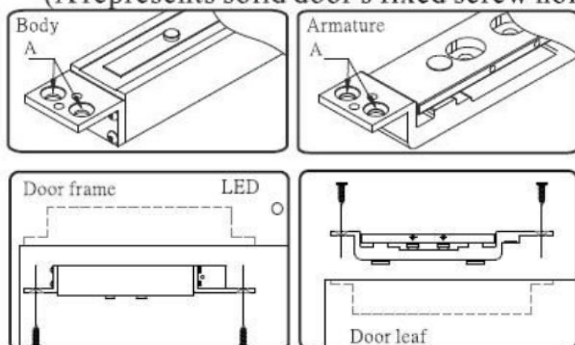



## B: Hollow door

(B represents solid door's fixed screw holes).

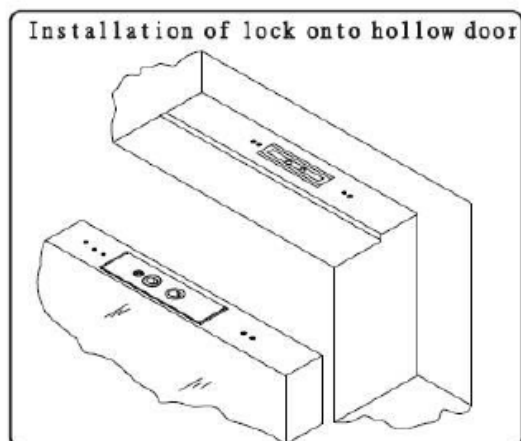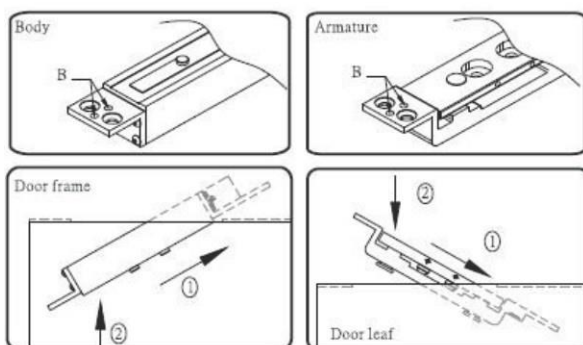Example I :When the distance between the door frame and the door leaf is too small.






-  **Step5:** Cut out the specific area according to the sticker and then mount the lock on the appointed position on the sticker. Drill a hole on the door frame for the indicator light where the lock is mounted. Use an electric drill to screw the lock tight and then fit the indicator light in the hole of the door frame.
-  **Step6:** Turn on power and close the door to check if the lock is functioning properly.


### Attentions!

The magnetic distance between the armature and the lock cannot exceed 3mm. use an allenkey to adjust the armature's screws to move upward. Please make sure the distance between the armature and lock is even and not tilted or uneven.

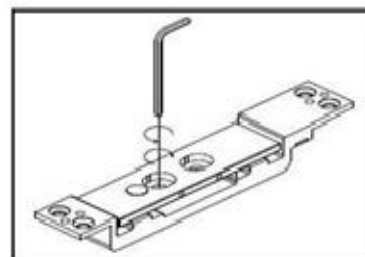

### Optional Brackets

Use an optional BR-500 bracket to mount the lock if the width or the depth of the door frame or door leaf is not enough. Use an optional UB-500 glass clip for frameless glass door.

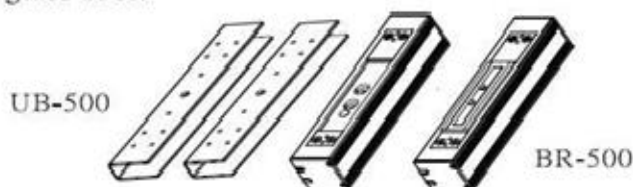

#### Example1:



Mount the lock unit into the door frame. Use an optional BR-500 bracket to fit the template. Please make sure the distance between lock and the template does not exceed 3mm.

#### Example2:

Use two BR-500 brackets to fit both lock and template. Please make sure the distance between the lock and the template does not exceed 3mm.

#### Example3:

Use UB-500 glass clip and BR-500 template for frameless glass door. UB-500 glass clip is able to fit frameless glass door with the thickness up to 14mm.

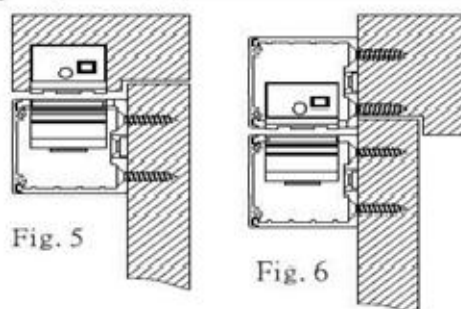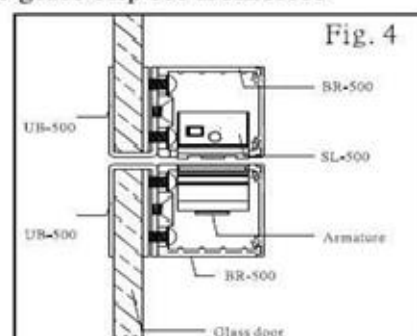

### Trouble shootings

#### Unable to lock.

Check the power supply. Check the magnetic range between the lock and the armature. Use an Allenkey to adjust the armature. Make sure the distance between the armature and the lock are even and not tilted or uneven.

#### Lock and release repeatedly.

The bolt did not throw and attach to the bolt hole of the armature.

1. Please check if both positions are matched when the door is closed according to the requirement of step2.
2. Please check the power supply.
3. please ckeck if the distance between the armature and the lock are even and not tilted or uneven.

Lock and release repeatedly before the door leaf is back to the closing position:

Adjust lock delay time or adjust door closer \*