

EL-RL200 ELECTRIC RIM LOCK (LEFT & RIGHT)





The RL200 is a heavy-duty fail secure rim lock designed for both left and right-hand door installations. With a holding force of 440 lbs (200kg), it offers reliable security for residential, commercial, and outdoor access points.

Built with durability in mind, the RL200 features an IP65 weatherproof rating, comes with rain shield making it suitable for use in outdoor environments or areas exposed to dust and rain. It operates on DC12V power supply with a current draw ranging from 1500mA to 3000mA, ensuring stable performance even under high usage.

Although it does not include door status sensor, door signal, or time delay function, it performs exceptionally well in demanding conditions, with a wide operating temperature range from -40°C to 50°C.


The RL200 is an ideal choice for customers seeking a secure, weather-resistant solution without compromising on reliability.

RIM LOCK SERIES

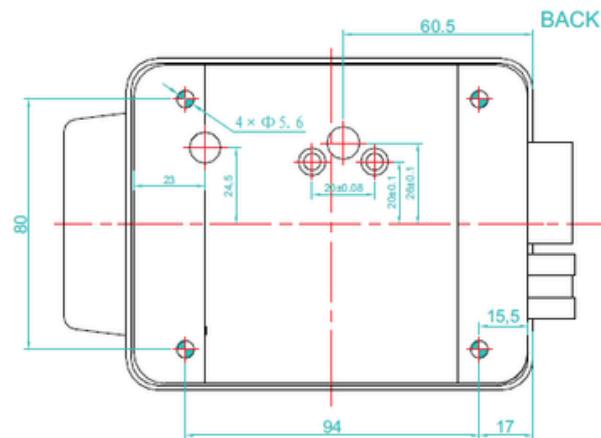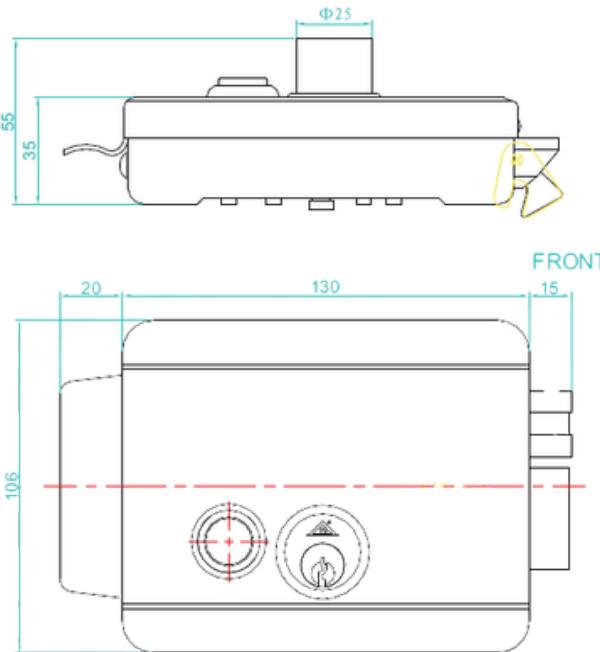


Holding Force:	440 lbs (200kg)
Power Supply :	DC12V
Current Draw:	1500mA to 3000mA
Door Status Sensor:	No
Door Signal:	No (Unmonitored)
Time Delay :	No
IP Rating:	IP 65 (Weatherproof)
Material:	Lock Body Iron, Cylinder & Latches Copper, Surface Spray Coating
Security Type:	Fail Secure
Working Temperature:	-40 °C to 50 °C
Weight:	2.1kg (4.6lbs)
Dimension:	165 (L) x 55 (W) x 106 (H)
Available In:	Right & Left

INSTALLATION DIAGRAM:

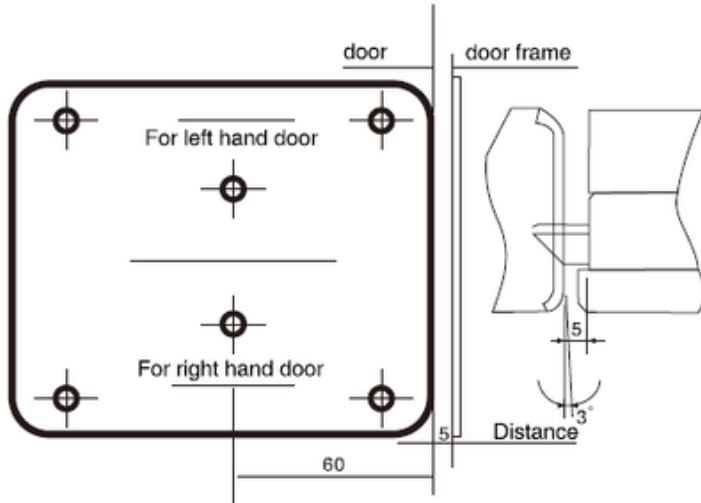

RIM LOCK INSTALLATION GUIDE:

RIM LOCK INSTALLED ON DOOR

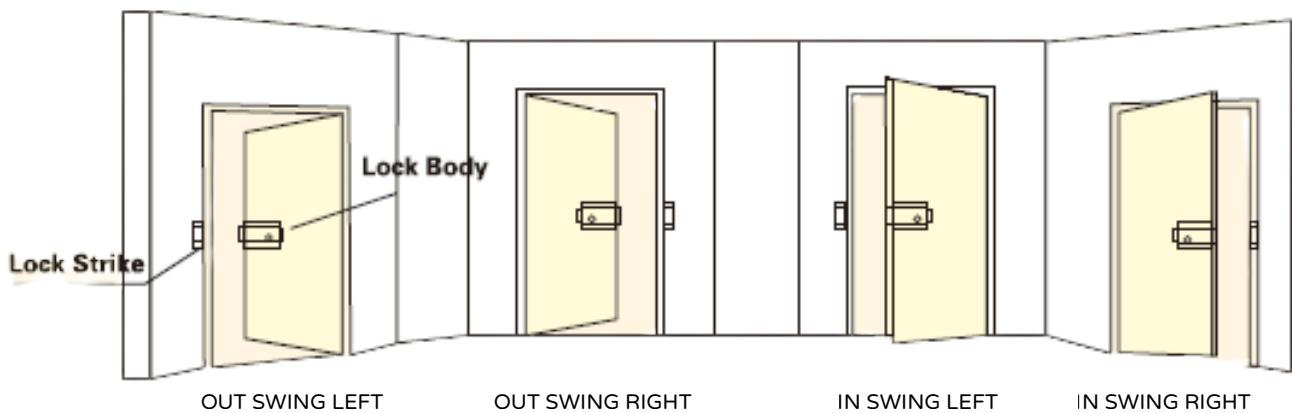

RIM LOCK INSTALLED ON DOOR FRAME

