

(Sliding Gate System)

## **Features**

Single phase induction motor couple with worm gear speed reducer with manual override release circuitry.

Soft Speed Motor: To buffer shock speed while reaching the ends Safety Approval: **CE** approved.

## **Technical Specification**

Operating Voltage: AC 220-240V 50Hz

Current: 5A Max.

Output power: 600W

Motor Rotation Speed: 1400rpm

Max. Weight of gate: 1000kg

■ Linear Speed: 10m/min

Transmission Type: Gear Rack and pinion

safety cut-off /auto reverse: electric load surge detector


Safety limit timer: yes

automatic lighting control: yes

lubrication: oil bath gear motor

remote controller: 2 channel 330 MH2 UH

## **User Guide: Dimension**

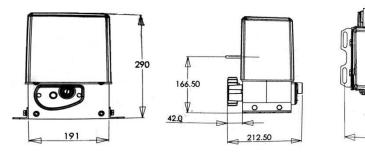



Kyodensha Technologies (M) Sdn Bhd (2057536-M) Digit Innovation Technologies (M) Sdn Bhd (646972-U)

No. 12A Jalan PPU3A, Pusat Teknologi Sinar Puchong 47150 Puchong Selangor, Malaysia TEL +603-8066 4636 +603-8051 5788 FAX +603-8051 4919

243

25

WEB www.elock2u.net EMAIL enquiry@elock2u.net