

Key Features :



- Highly resistant ABS housing, UV prevention
- Magnetic dynamic sounders with 120dB at 1M
- With / without backup battery (Optional)
- Positive / negative siren trigger
- Positive / negative flash trigger
- 3 way tamper switch protection

Available In :



EL-305R



EL-305B


Specification :

Operating Voltage	13.8VDC ~ 14.5VDC
Current Consumption	Standby : 8mA Alarm : 1600mA (DC : 13.8V)
Backup Battery	Rechargeable Lead Acid Battery 12V 1.3AH
Flashlight	Lamp 12VDC/5W
Siren Output	118 ±3dB/M
Fundamental Frequency	1850Hz (Range : 1300 - 2400Hz)
Siren Tone	Yelp
Operating Temperature	-30°C ~ +60°C
Case Protection Level	Water Splash Resistant / ABS housing with UV Protection
IP Rating	IP45
Dimensions	270mm (L) x 193mm (W) x 100mm (H)
Weight (without battery)	1.85Kg

Characteristics :



Internal Structure

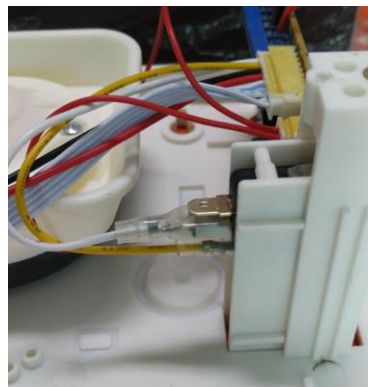

**Triple Tamper Protection
(Lid, Wall, Screw Protection)**



Backup Battery 12V 7AH




Internal Metal Protection



**Alarm Indicator
LEDs Flashlight**

Standalone Operation :

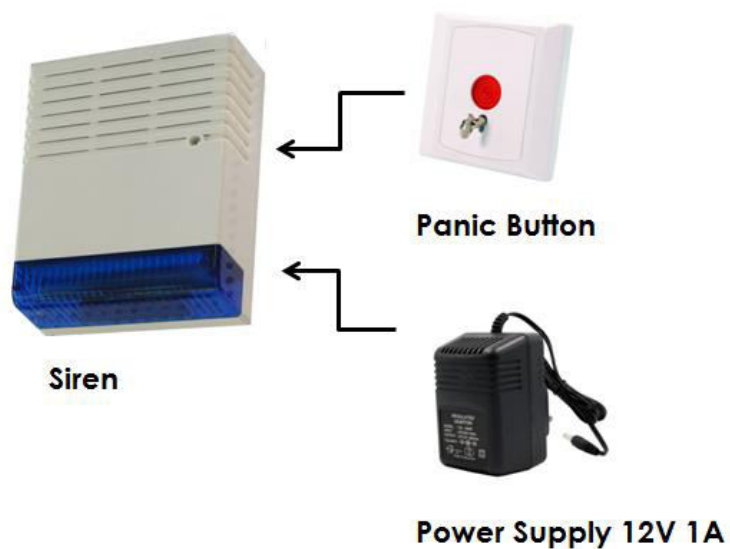

Connect to Alarm System :

