



## **Overview**

EL-DH-605 is a wall mount and floor mount door holder, which adopts low power consumption, that makes it more environment friendly and more durable. Professional anti-residual magnetism design ensures highest security. It will release automatically the fire door when fire alarms. It also contains build-out release button for testing and build-in MOV which reverse current protection.


## **Specification**


Product Parameter	Parameter Description
Dimensions	L116 x W93 x H118 (mm)
Holding Force	50kg (110Lbs)
Voltage	12/24VDC +/- 10%
	(Adjustable)
Current Draw	12V/180mA 24V/70mA
Optional	Manual door release button
Suitable for	All kind of Single & Double
	Smokeproof Doors
Surface Temp	≤ <b>+20</b> °C
Operating Temp	-10~+55°C(14-131F)
Suitable Humidity	0~90%(relative humidity)
Finishes for Shell	High Temperature Paint and
	Environmental Protection
	Zinc
Finishes for Armature	Zinc
Weight	1.4kg




FAX +603-8051 4919 WEB www.elock2u.net EMAIL enquiry@elock2u.net


## **Dimensions**





## Installation



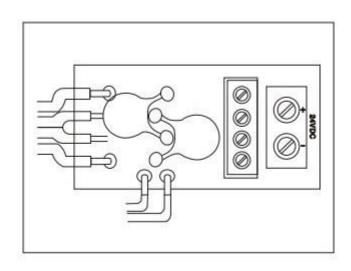

Wiring Instructions



Kyodensha Technologies (M) Sdn Bhd (2057536-M) Digit Innovation Technologies (M) Sdn Bhd (646972-U)

No. 12A Jalan PPU3A, Pusat Teknologi Sinar Puchong 47150 Puchong Selangor, Malaysia TEL +603-8066 4636 +6038051 5788 FAX +603-8051 4919 WEB www.elock2u.net EMAIL enquiry@elock2u.net