


Specification

- Illuminated Switch
- Narrow Style
- Single Pole Double Throw Double Break Switching Mechanism
- Contact Rating : 5A 250VAC, 6A 24VDC
- Illumination lamp 60V/1.62W Max
- CE approved.
- Dimension : 102mm(L) x 35mm(W) x 22.2mm(H)

Technical Information




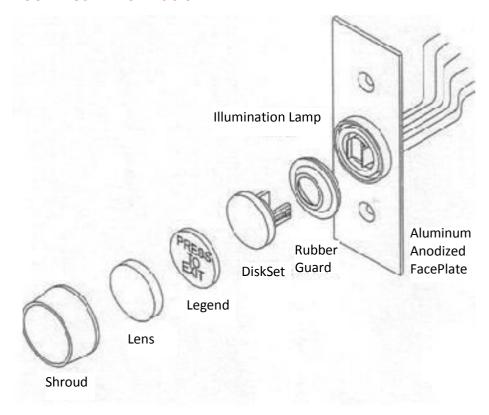

Kyodensha Technologies (M) Sdn Bhd (2057536-M) Digit Innovation Technologies (M) Sdn Bhd (646972-U)

No. 12A Jalan PPU3A, Pusat Teknologi Sinar Puchong 47150 Puchong Selangor, Malaysia TEL +603-8066 4636 +603-8051 5788 FAX +603-8051 4919

WEB www.elock2u.net EMAIL enquiry@elock2u.net

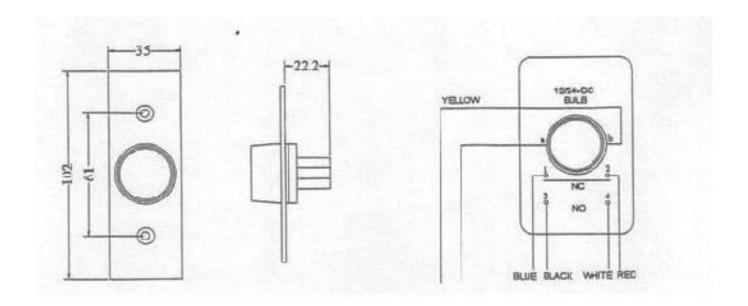

- N/C- Normally Closed Connection between blue & red wire for normally closed.
- N/O- Normally Open Connection between black & white wire for normally open.



Kyodensha Technologies (M) Sdn Bhd (2057536-M) Digit Innovation Technologies (M) Sdn Bhd (646972-U)