

## **Features**

*Emergency Break Glass EL-EB4* series is equipped with single pole change over contacts from N/C to N/O It is normally used to override electrical locking / release devices in

case of emergency.

- Convenient testing with reset key
- Can be surface or flush mounted
- Glass replaceable
- Dimension : 87mm W x 87mm H x 52mm D
- Safety Approval : CE
- Material : ABS PA-757

## **Specification**

- Current Rating :
  - o 12/24V DC 10A
  - 48V DC 3A
  - o 250V AC 10A
- Operating temperature : 0~65 deg C

## Available in







Kyodensha Technologies (M) Sdn Bhd (2057536-M) Digit Innovation Technologies (M) Sdn Bhd (646972-U)

No. 12A Jalan PPU3A, Pusat Teknologi Sinar Puchong 47150 Puchong Selangor, Malaysia

TEL	+603-8066 4636	+603-8051 5788
FAX	+603-8051 4919	
WEB	www.elock2u.net	
EMAIL	enquiry@elock2u	i.net

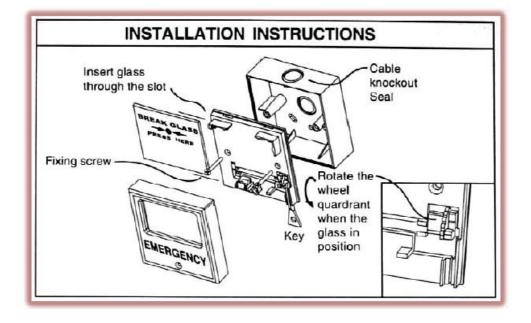

## CONNECTION INSTRUCTION



1 and 3 - open circuit system 2 and 3 - close circuit system



Kyodensha Technologies (M) Sdn Bhd (2057536-M) Digit Innovation Technologies (M) Sdn Bhd (646972-U)

No. 12A Jalan PPU3A, Pusat Teknologi Sinar Puchong 47150 Puchong Selangor, Malaysia

TEL	+603-8066 4636 +603-8051 5788	
FAX	+603-8051 4919	
WEB	www.elock2u.net	
EMAIL	enquiry@elock2u.net	