


EL-KS1

## Specification

- 2 Position Removable Key, Single Pole
- Flush Stainless Steel Face Plate
- Lock Housing: Zinc Alloy Die-casted, Chrome Plated
- Cylinder : 7 Pin Constructed, Zinc Alloy Die-casted
- Tubular key Nickel Plated
- Contact Rating : 4A 125VAC, 2A 250VAC
- CE approved.
- Dimension : 86.8mm(L) x 86.8mm(W) x 23mm(H)

## Technical Information

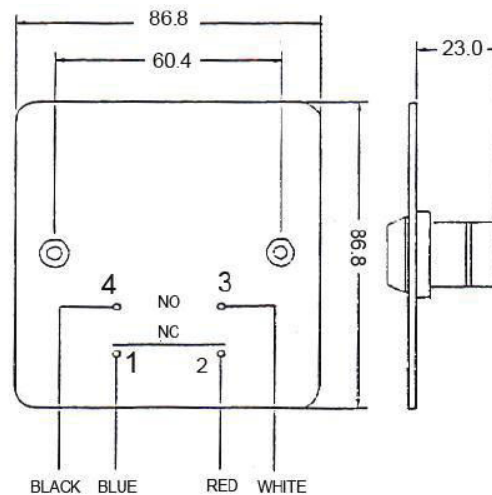

N/C - Normally Closed:  
Connection between blue & red  
wired for normally closed.

N/O - Normally Open:  
Connection between black & white  
wired for normally open