

EL-ST850 series button is casted by 304 stainless steel with drawing panel processing. It is elegant style with long time usage.

Specification :

Parameter	Description
Dimension	86 x 50 x 25 (mm)
Standard Structure	Stainless Steel Panel, Steel Button
Panel Material	304 Stainless Steel, Wire Drawing Finished
Contact Rating	3A@36VDC Max
Output Contact	NO/NC/COM
Mechanical Life	500,000 Tested
Certification	CE Approved
Operating Tempure	10°C ~ 55°C
Weight	110g




Kyodensha Technologies (M) Sdn Bhd (2057536-M) Digit Innovation Technologies (M) Sdn Bhd (646972-U)

No. 12A Jalan PPU3A, Pusat Teknologi Sinar Puchong 47150 Puchong Selangor, Malaysia

TEL	
FAX	
WEB	
EMAIL	

+603-8066 4636 +603-8051 5788 +603-8051 4919 www.elock2u.net enquiry@elock2u.net

Technical Information :

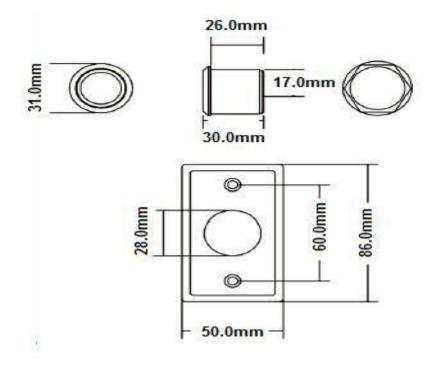



Kyodensha Technologies (M) Sdn Bhd (2057536-M) Digit Innovation Technologies (M) Sdn Bhd (646972-U)

No. 12A Jalan PPU3A, Pusat Teknologi Sinar Puchong 47150 Puchong Selangor, Malaysia

TEL	-
FAX	H
WEB	1
EMAIL	

+603-8066 4636 +603-8051 5788 +603-8051 4919 www.elock2u.net enquiry@elock2u.net