

Resettable Emergency Door Release

Description:

The EM-201 resettable door release is unlike the break glass unit. It offers the benefits & environmental advantages of a resettable operating element.

Key Features:

- Double Pole
- Fast and easy installation, Special tool operating test facility
- Unique 'Plug & Play' installation concept
- Simple maintenance Only one tool is needed for test and reset
- Choice of surface or flush mount, Marking options

Technical Specification:

- Operating voltage: 30 VDC
- Operating current: 2 A
- Contact : 2 Pole (2NC, 2NO, 2COM)
- Withstood-voltage: 250 VAC
- Temperature range: -30 °C to +70 °C
- Ingress protection rating: IP24D
- Mounting way: Wall mounting
- Dimension: 87 mm x 87 mm x 52 mm





Accessories:

Code	Description	
EM201MM	Plain Hinged Cover	
EM201MM-EA	Plain Hinged Cover (Emergency Use Only) With Red Color Arabic Text	
EM201MM-EAB	Plain Hinged Cover (Emergency Use Only) With Black Color Arabic Text	




Kyodensha Technologies (M) Sdn Bhd (2057536-M) Digit Innovation Technologies (M) Sdn Bhd (646972-U)

No. 12A Jalan PPU3A, Pusat Teknologi Sinar Puchong 47150 Puchong Selangor, Malaysia

TEL	+603-8066 4636	+603-8051 5788
FAX	+603-8051 4919	
WEB	www.elock2u.net	
EMAIL	enquiry@elock2u	.net

Resettable Emergency Door Release Dimension :

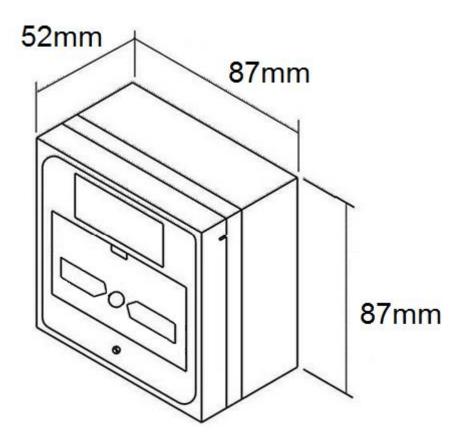



Kyodensha Technologies (M) Sdn Bhd (2057536-M) Digit Innovation Technologies (M) Sdn Bhd (646972-U)

No. 12A Jalan PPU3A, Pusat Teknologi Sinar Puchong 47150 Puchong Selangor, Malaysia
 TEL
 +603-8066
 4636
 +603-8051
 5788

 FAX
 +603-8051
 4919
 WEB
 www.elock2u.net

 EMAIL
 enquiry@elock2u.net
 Email
 enquiry@elock2u.net