

EL-800P

Features

EL-800P white color miniature door contact is meant for easy installation.


Suitable for most security system.

- Ruthenium Over Gold Reeds
- UL approved PVC Lead Out wire


Specification

- Maximum Contact Rating :- 100VDC 0.5A 10W
- **Wide Gap :** 1” **Wide Gap Closed Loop**
- Dimension : (33 L x 15 W x 8 D) mm
- Safety Approval:- **CE**
- ISO 9000 certified Manufacturer
- IP Rating: 65

User Guide: Product Dimension

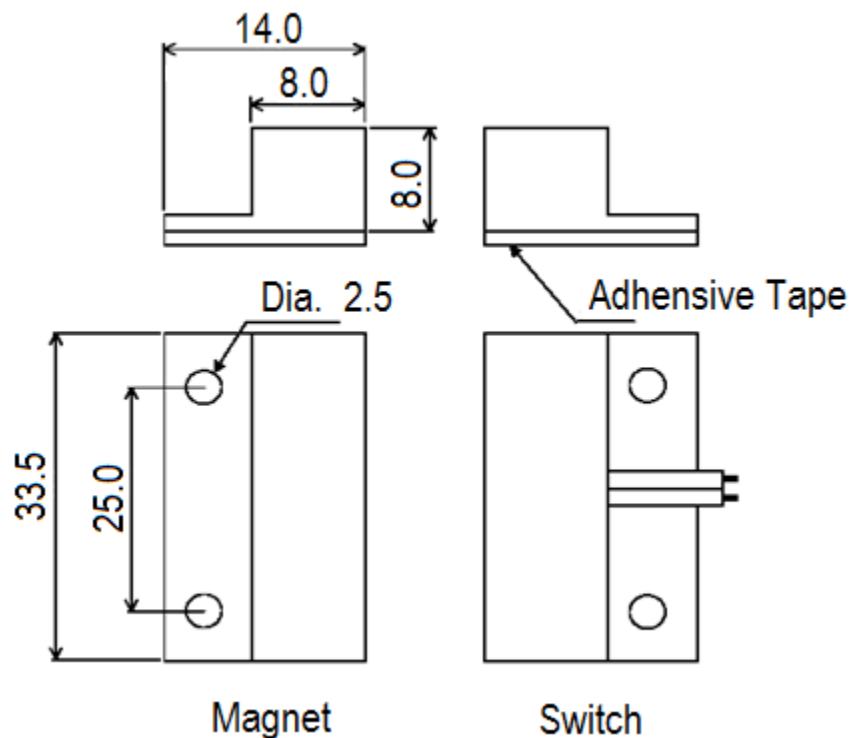


Installation Instruction:

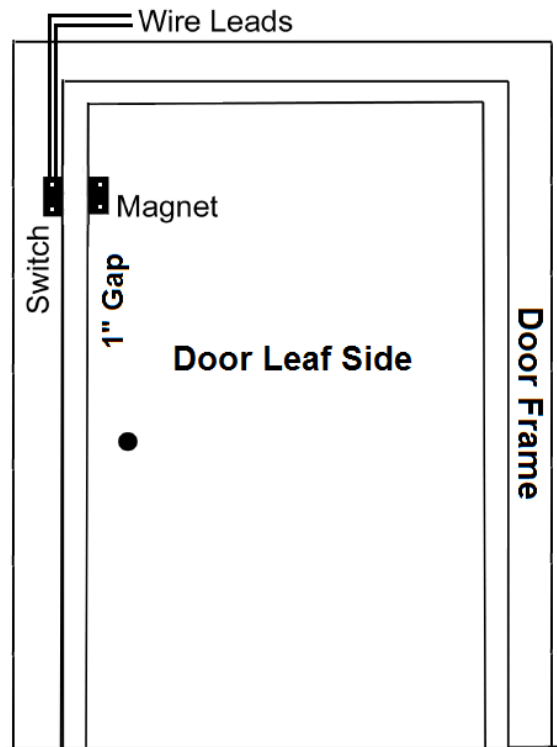

1. Place the switch (with wire) on door frame, mark the mounting position and fix the screw in door frame to mount the switch
2. Place the magnet on door leaf, mark the mounting position and fix the screw in door leaf to mount the magnet
3. Make sure maximum gap is 1 inch between switch and magnet
4. Connect the wire leads from reed switch to panel
5. Designed for use with steel, wood and other door and window materials

Surface Mount

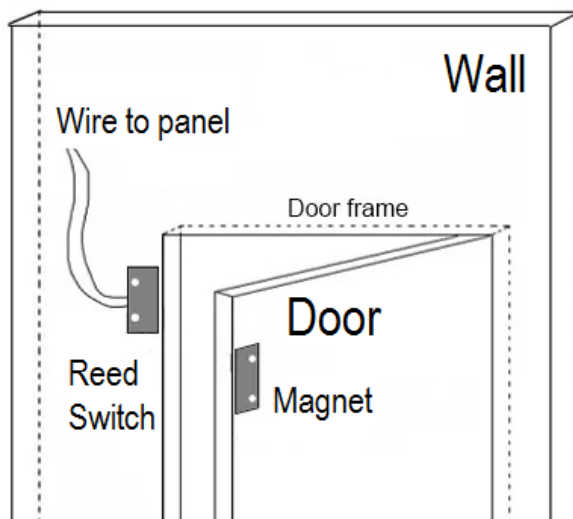



Kyodensha Technologies (M) Sdn Bhd (2057536-M)
Digit Innovation Technologies (M) Sdn Bhd (646972-U)

No. 12A Jalan PPU3A,
Pusat Teknologi Sinar Puchong
47150 Puchong Selangor, Malaysia

TEL +603-8066 4636 +603-8051 5788
FAX +603-8051 4919
WEB www.elock2u.net
EMAIL enquiry@elock2u.net