

Features


EL-810R Roller Shutter Sensor offers High Grade Magnet and provides adjustable bracket for installation.

Specification

- Adjustable Bracket for flexible mounting
- Sensitivity width up to 90 mm
- Double Magnet system for best reliability
- Wire concealed in specially designed
- plastic housing for best protection
- Suitable for most security system
- Maximum Contact Rating :-
- 100VDC 0.5A 10W
- Safety Approved:- CE
- Dimension :- Magnet : 100(L) x 30(W) x 5.5(D) mm

WEB www.elock2u.net enquiry@elock2u.net

Installation Guide

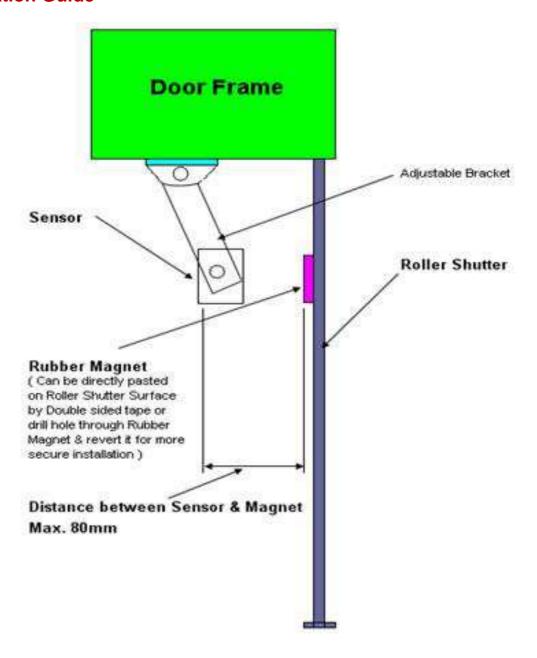



Kyodensha Technologies (M) Sdn Bhd (2057536-M) Digit Innovation Technologies (M) Sdn Bhd (646972-U)

No. 12A Jalan PPU3A, Pusat Teknologi Sinar Puchong 47150 Puchong Selangor, Malaysia TEL +603-8066 4636 +603-8051 5788 +603-8051 4919

WEB www.elock2u.net EMAIL enquiry@elock2u.net