




EL-820P

Features


EL-820P Commercial Metal Contact offers high quality door contact with high grade magnet and designed in miniature size which eases for installation.

- Miniature size for easy installation
- Cast aluminum casing for harsh environments
- Ruthenium Over Gold Reeds
- UL approved PVC Lead Out wire
- ISO 9001 Certified Manufacturer
- IP Rating : IP65
- Operating Temperature : -20°C to +80°C


Specification

- Maximum Contact Rating :- 100VDC 0.5A 10W
- **Wide Gap** : 1 1/2" (38 mm)  Wide Gap Closed Loop
- Dimension : (51 L x 19 W x 9.5 D) mm
2" L x 3/4" W x 3/8" D
- Cable Spec : Length 270mm, 22AWG, UL1007 Standard

User Guide: Product Dimension

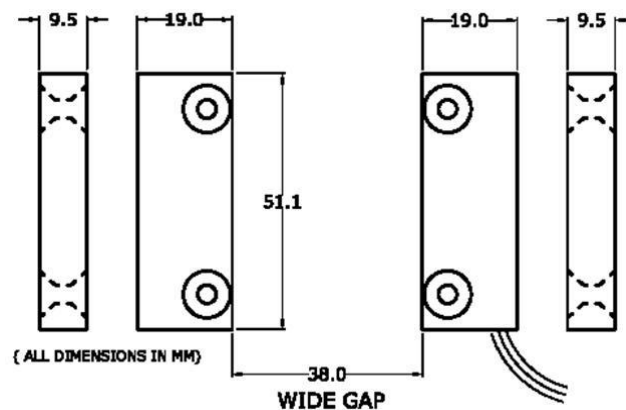

Installation Instruction:

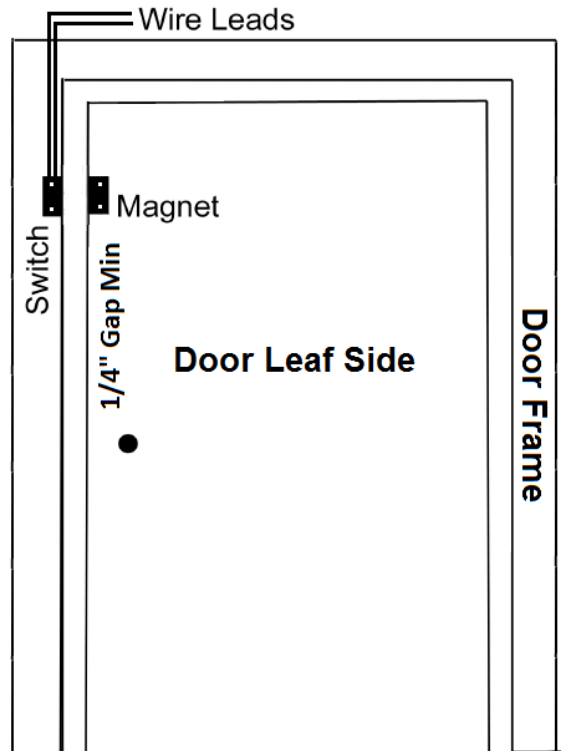

1. Place the switch (with wire) on door frame, mark the mounting position and fix the screw in door frame to mount the switch
2. Place the magnet on door leaf, mark the mounting position and fix the screw in door leaf to mount the magnet
3. Make sure min gap is $\frac{1}{4}$ inch between switch and magnet
4. Connect the wire leads from switch into alarm circuit
5. Designed for use with steel, wood and other door and window materials