

EL-840P / EL-840PB

Features

EL-840P 3/4" Steel Door Contacts offers high quality door contact with high grade magnet and designed in miniature size which ease for installation.

- Designed specifically for steel door installation with • Self-locking housing
- 3/4" diameter press to fit
- Ruthenium Over Gold Reeds


Specification

- #22AWG UL approved Lead wire
- Maximum Contact Rating: 100VDC 0.5A 10W
- Wide Gap up to : 1 1/2" (38 mm) with Rare Earth Magnet designed for steel door
- Weather Resistant Rating IP65
- Dimension (mm): (30 L x 19 Dia) mm
- Safety approvals : CE
- **Electrical Specification:** Voltage: 100 V AC/DC max. Current: 0.5 A max. Power: 10 W max.

Color Available :

White : EL-840P Brown: EL-840PB

User Guide: Product Dimension






Kyodensha Technologies (M) Sdn Bhd (2057536-M) Digit Innovation Technologies (M) Sdn Bhd (646972-U)

No. 12A Jalan PPU3A, Pusat Teknologi Sinar Puchong 47150 Puchong Selangor, Malaysia


TEL	+603-8066 4636	+603-8051 5788
FAX	+603-8051 4919	
WEB	www.elock2u.net	
EMAIL	enquiry@elock2u	.net

Installation Instruction:

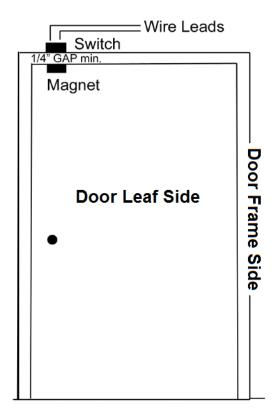

- Drill 3/4" hole in door frame side (NOT on door leaf side) to mount the switch
- 2. Drill 3/4" hole in door leaf side to mount the magnet
- Make sure gap is not less than 1/4" between switch and magnet
- 4. Connect the wire leads from switch into alarm circuit / door access controller / keypad card reader
- 5. Designed for use with steel, wood and other door and window materials

Wiring Diagram :

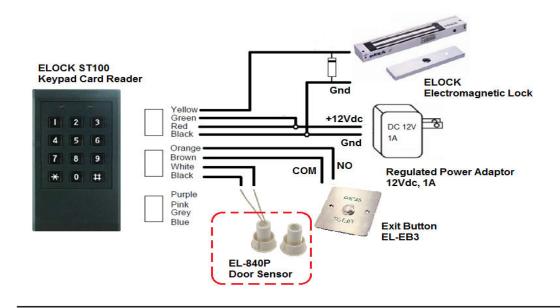



Kyodensha Technologies (M) Sdn Bhd (2057536-M) Digit Innovation Technologies (M) Sdn Bhd (646972-U)

No. 12A Jalan PPU3A, Pusat Teknologi Sinar Puchong 47150 Puchong Selangor, Malaysia

TEL	+603-8066 4636 +603-8051 5788	В
FAX	+603-8051 4919	
WEB	www.elock2u.net	
EMAIL	enquiry@elock2u.net	