

## EL-NT8610 WATERPROOF TOUCHLESS EXIT BUTTON



EL-NT8610 Waterproof Touchless Exit Button is a sleek, hands-free solution designed for hygiene-critical and high-traffic areas. Made with an aluminium frame and tempered glass panel, it outperforms typical plastic buttons in durability and style.


With an IP67 rating, it's dust-tight and waterproof—ideal for both indoor and outdoor use. It supports NO/NC/COM contact outputs, runs on DC12V/24V, and integrates easily into wired access control systems.

The LED indicator features a breathing light effect and adjustable sensor (5–30 cm) enables safe, contactless activation, making it both visually appealing and user-friendly. Tested for over 1,000,000 cycles and qualified by aging tests, the EL-NT8610 ensures long-term reliability and smooth operation.

Its compact 86 (H) x 10 (D) x 86 (W) mm design suits hospitals, cleanrooms, and modern facilities where touch-free access matters.

# EXIT BUTTON SERIES

**elock**<sup>®</sup>  
Your Security is Our Responsibility

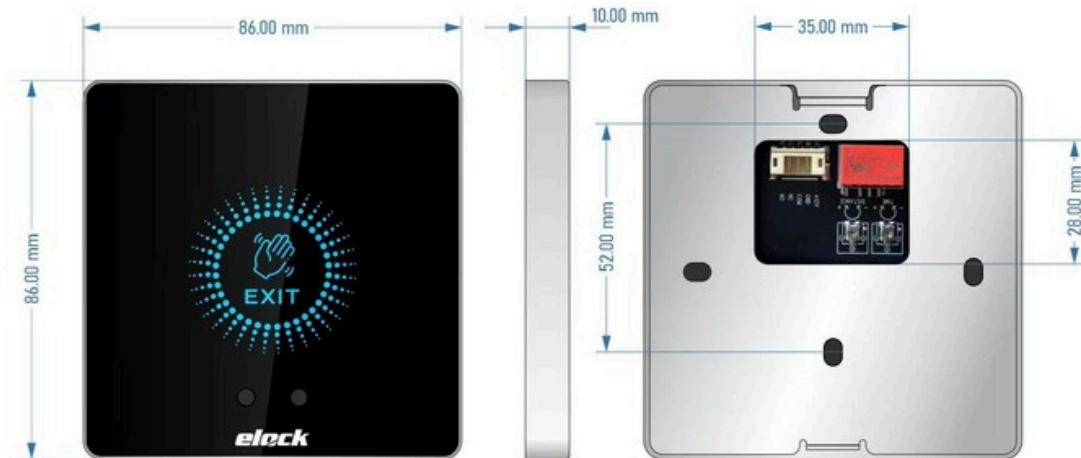

|                  |                                       |
|------------------|---------------------------------------|
| Power Supply     | DC12V / DC24V                         |
| Contact Type:    | N.O/ N.C/ COM                         |
| Sensor Distance: | Adjustable 5-30 cm                    |
| Material:        | Aluminium Frame+ Tempered Glass Panel |
| IP Rating:       | IP67 ( Dust Tight & Waterproof 1m)    |
| Mechanical Life: | 1,000,000 Tested Aging Test Qualified |
| LED:             | Breathing Light Effect                |
| Dimension:       | 86 (H) x 10 (D) x 86 (W) mm           |

# EXIT BUTTON SERIES


## Distance & Time Control

To control the proximity sensing distance and time delay, use a screwdriver. Turn Rotary Knob #1 for control proximity distance & Knob #2 for control time delay. Rotate clockwise to increase desired & counter-clockwise to decrease the parameter.




## Waterproof

IP67-Rated: Fully dust-tight and waterproof up to 1 meter depth for 30 minutes, making it ideal for outdoor use.

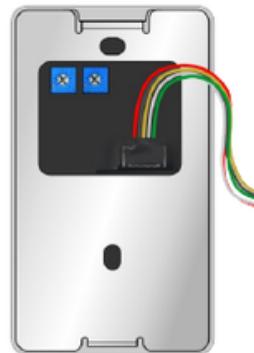


## Connection


### Fail-Safe Lock

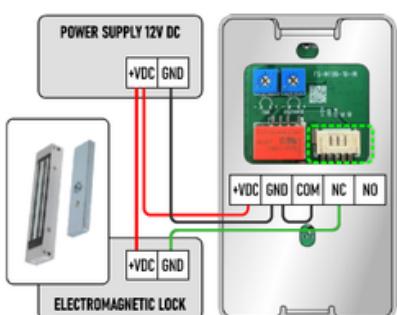

### Fail-Secure Lock

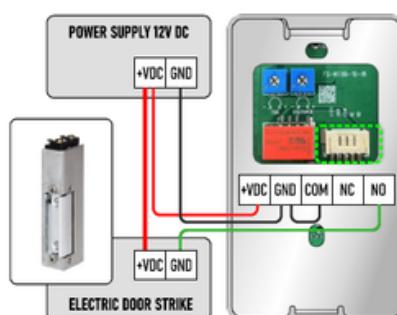

### Access Control System

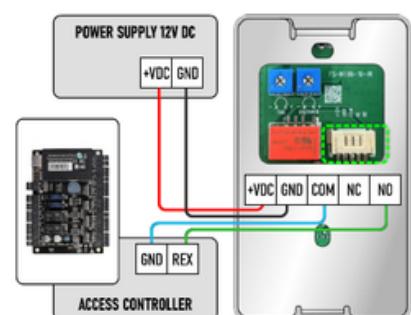

|        |  |      |
|--------|--|------|
| RED    |  | +VDC |
| BLACK  |  | GND  |
| YELLOW |  | COM  |
| WHITE  |  | NC   |
| GREEN  |  | NO   |