elock®
Your Security is Our Responsibility

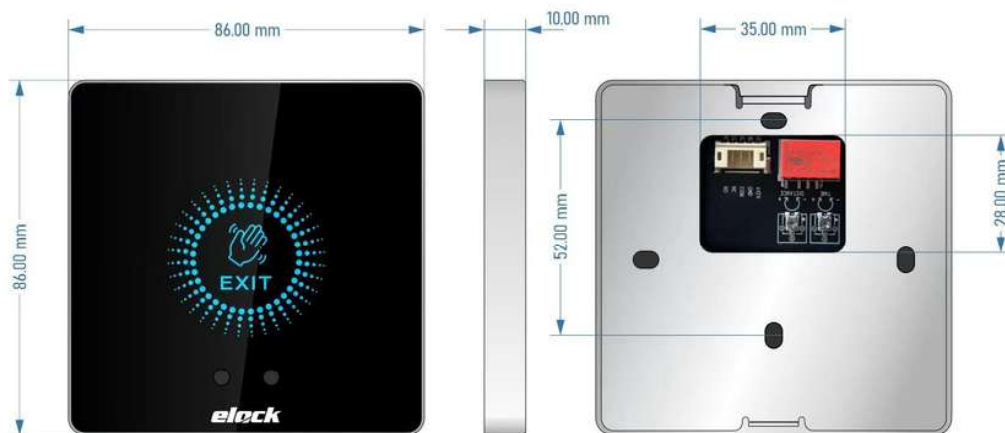## DA-NT8610 WATERPROOF
TOUCHLESS EXIT BUTTON

DA-NT8610 Waterproof Touchless Exit Button is a sleek, hands-free solution designed for hygiene-critical and high-traffic areas. Made with an aluminium frame and tempered glass panel, it outperforms typical plastic buttons in durability and style.

With an IP67 rating, it's dust-tight and waterproof—ideal for both indoor and outdoor use. It supports NO/NC/COM contact outputs, runs on DC12V/24V, and integrates easily into wired access control systems. The adjustable sensor (5–30 cm) enables safe, contactless activation.

Its compact 86 x 86 x 10 mm design suits hospitals, cleanrooms, and modern facilities where touch-free access matters.

Subject to change without notice

EXIT BUTTON SERIES

Power Supply	DC12V / DC24V
Contact Type:	N.O/ N.C/ COM
Sensor Distance:	Adjustable 5-30 cm
Material:	Aluminium Frame+ Tempered Glass Panel
IP Rating:	IP67 (Dust Tight & Waterproof 1m)
Mechanical Life:	1,000,000 Tested Aging Test Qualified
LED:	Breathable
Dimension:	86 (L) x 86 (W) x 10 (H) mm

www.elock2u.net

Subject to change without notice

EXIT BUTTON SERIES

Distance & Time Control

To control the proximity sensing distance and time delay, use a screwdriver. Turn Rotary Knob #1 for control proximity distance & Knob #2 for control time delay. Rotate clockwise to increase desired & counter-clockwise to decrease the parameter.

Waterproof

IP67-Rated: Fully dust-tight and waterproof up to 1 meter depth for 30 minutes, making it ideal for outdoor use.

Connection

Fail-Safe Lock	Fail-Secure Lock	Access Control System

RED		+VDC
BLACK		GND
YELLOW		COM
WHITE		NC
GREEN		NO

Subject to change without notice