




Features

e-lock-600C EM Lock is the Eco-series of existing 600 lbs EM Lock. The stylish ABS Bracket at both edges completely seal the machining edge of Aluminum housing gives a perfect outline of EM Lock. e-lock-600C Series electromagnetic locks offer cost effective solution with easy installation & suitable for variety of application . It has no moving parts thus keeping maintenance to a minimum. All types of brackets are available to ease installation for both in-swing & out-swing doors.

Specification

- 600lbs holding force
- Supply voltage 12Vdc
- Current drawn 500mA
- MOV surge protection
- Fail-Safe type
- Dimension : -
Magnet : 250(L) X 41(W) X 26(D) mm


User Guide

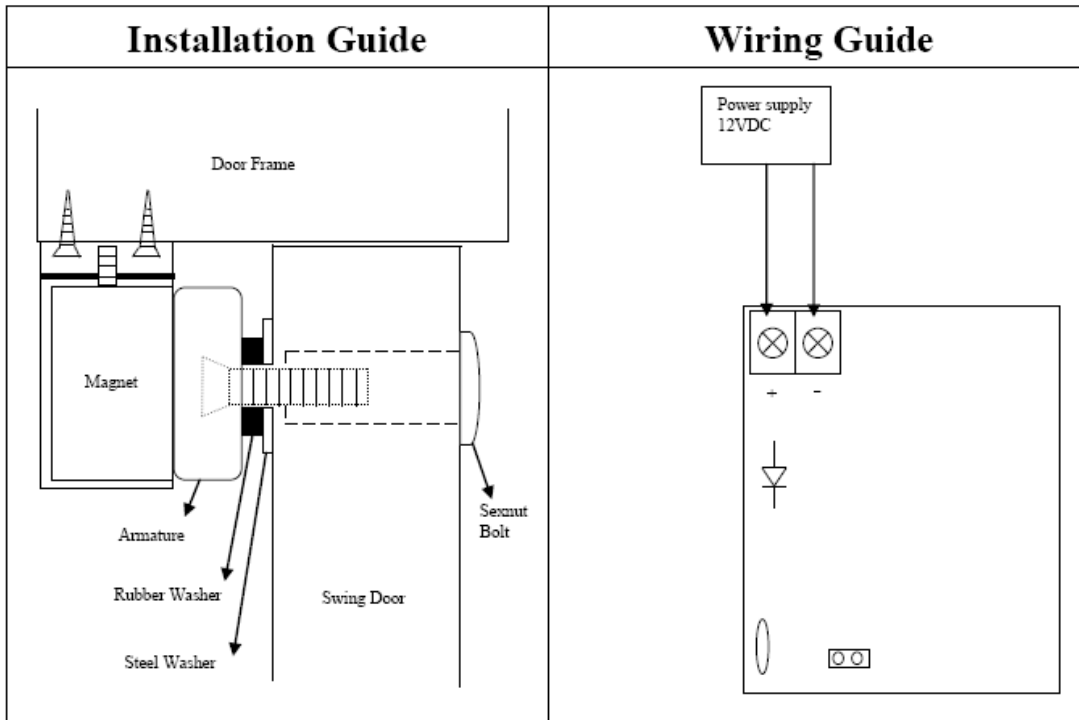

Optional Brackets


EL-BKL (L Bracket)

- Adjustable "L" bracket for outward door when the header is narrow.
- Available for elock-300, 600 & 1200 Series.

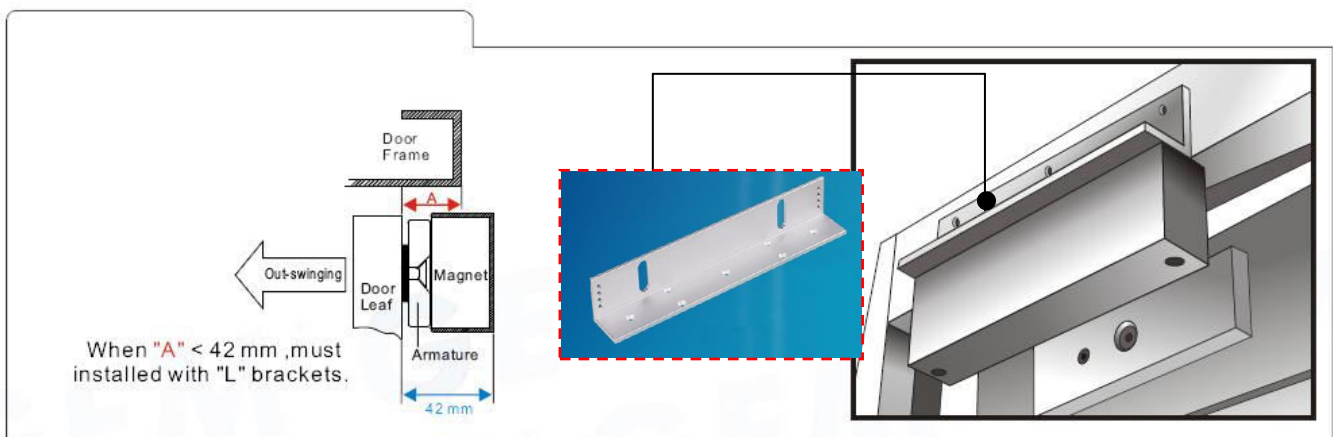


EL-BKZ (ZL Bracket)

- Adjustable "ZL" bracket for inward door application.
- Available for elock-300, 600 & 1200 Series application.

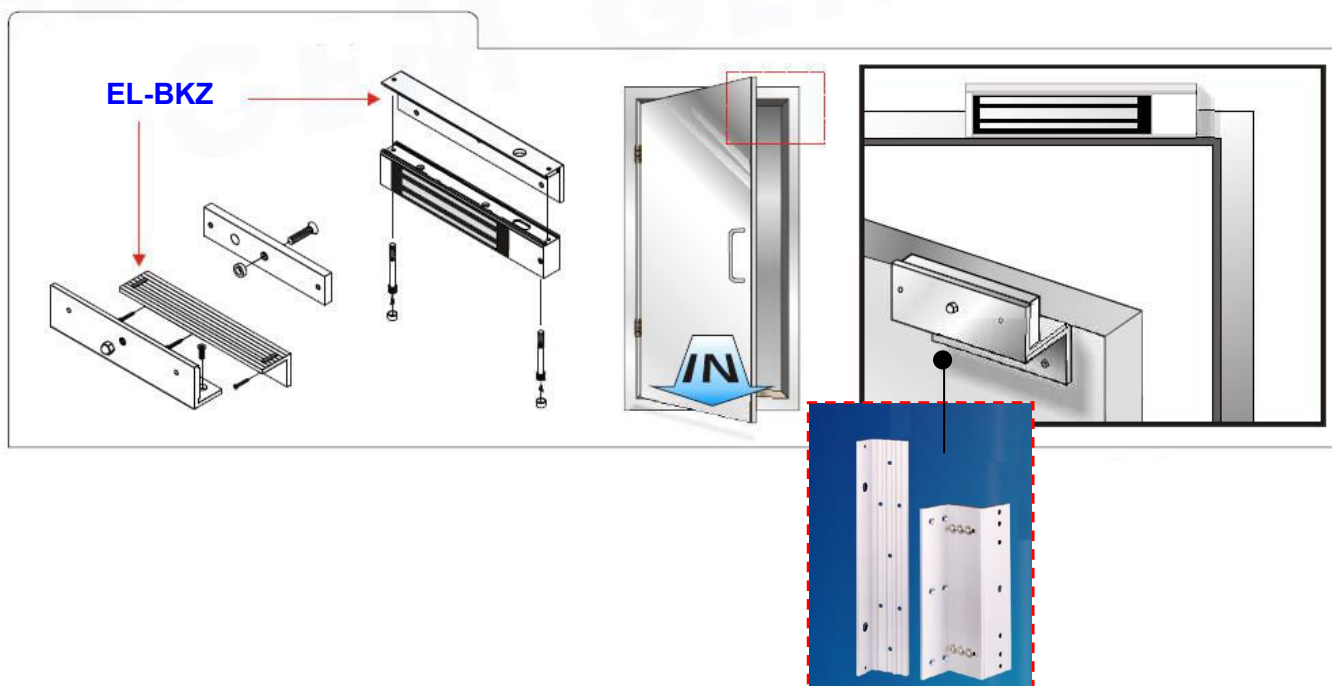

EL-BKU (U Bracket)


- Specially designed for glass door solution.
- Available for elock-300 & 600 Series.

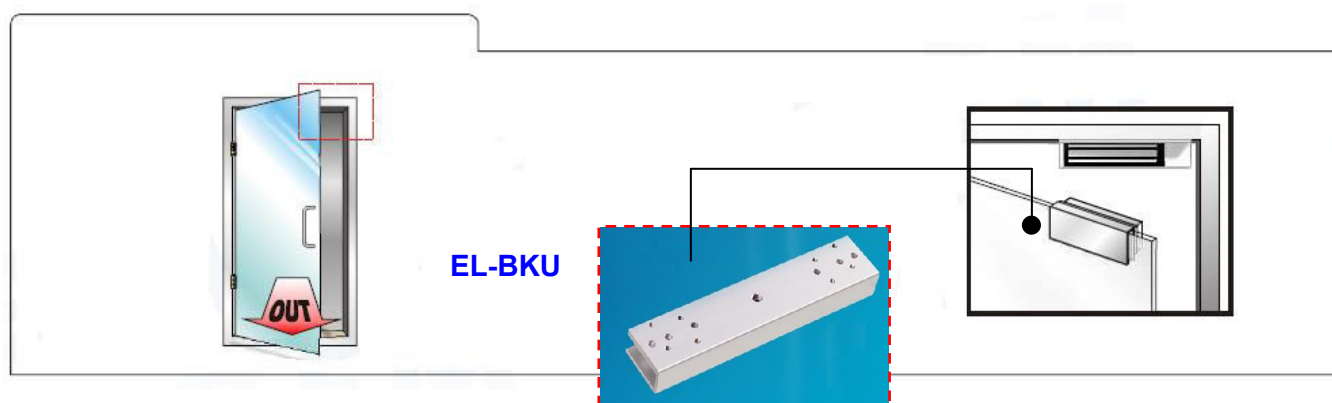

Mounting Diagram


Standard Mounting:

- With Filler Plate attached on top of EM Lock.

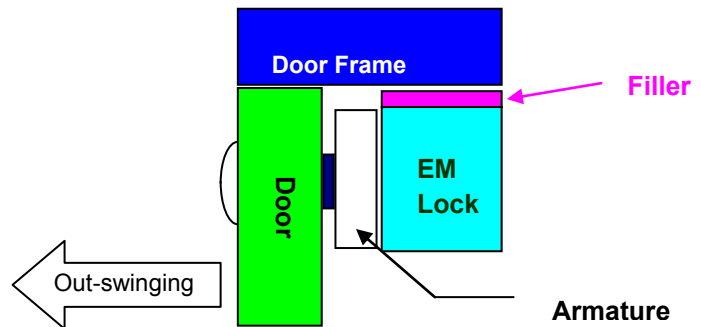

L Bracket Mounting :

- Mounting with "Adjustable L Bracket" when Door frame is narrow.
- Mounting Procedure :-
Remove the original "Filler Plate" attached to EM Lock, replaced with " Adjustable L Bracket " set.

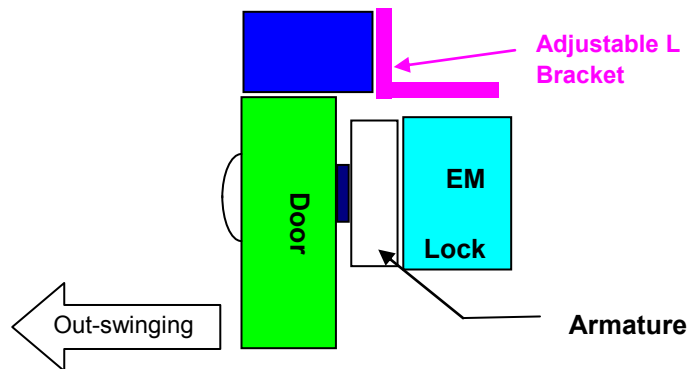

ZL Bracket mounting :

- Mounting with " ZL Bracket " for In-swing door application.
- Mounting Procedure :-
Remove the original "Filler Plate" attached to EM Lock, replaced with " Adjustable ZL Bracket " set.

